Specification Sheet



DESCRIPTION:

10 AWG 6 conductor 7 strand bare copper with XLPE insulation, an XLPE insulated bare copper ground, unshielded, interlocked aluminum armor with an overall PVC jacket 600V metal clad cable, approved for use in SUN RES DIR BUR 90°C applications.


1. CONDUCTOR	
1.1. AWG Size & Stranding:	10 AWG 7 Strands Class B
1.2. Material:	Annealed Bare Copper
1.3. Conductor Count:	Annealed Bare Copper

2. INSULATION	
2.1. Material:	Cross-linked Polyethylene
2.2. Wall Thickness:	0.030"
2.3. Color Code:	Black, Red, Blue, Orange, Yellow, Brown + (1) Insulated Green Ground

3. ASSEMBLY	
3.1. Ground:	Insulated (Green) – 10 AWG 7 Strand Bare Copper
3.2. Fillers:	Non-Hygroscopic Polypropylene - As required for a circular cross- section Clear
3.3. Binder:	Mylar
3.4. Shield:	N/A
3.5. Drain Wire:	N/A

4. INTERLOCKED ARMOR	
4.1. Material:	Interlocked Aluminum



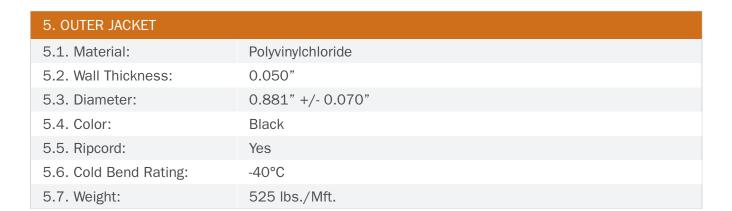

6. MARKINGS	
6.1. Type:	Cable shall be permanently identified via surface inkjet print
6.2. Legend:	E# 10AWG 6C (UL) MC XHHW-2/VW-1 600V 90C DRY/WET
	INSULATED GROUND INTERLOCKED ALUMINUM ARMOR PVC JACKET
	WET LOCATIONS CABLE SUNLIGHT RESISTANT, FOR CT USE DIR BUR
	IEEE 1202/FT4 "ROHS COMPLIANT" MADE IN USA
6.3. Footage Markers:	Yes







7. STANDARDS	
7.1.	UL listed as Type MC per UL Standard 1569 for metal clad cables
7.2.	Cable is suitable for use in Class I Division 2 hazardous locations
7.3.	Individual conductors pass UL VW-1 flame test, rated XHHW-2/VW-1
7.4.	UL approved for Direct Burial & Sunlight Resistant applications
7.5.	Meets ICEA S-73-532, where applicable
7.6.	Cable meets UL 1581 & 1202 (FT-4) 70,000 BTU/HR & ICEA T-29-520 210,000 BTU/HR requirements
7.7.	Cable meets RoHS 2002/95/EC Directive, RoHS 2 2011/65/EU Directive, RoHS 3 2015/863/EU Directive
7.8.	Made in the USA
7.9.	⚠ WARNING: This product may contain chemicals, such as Vinyl Chloride, known to the state of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov. Wash hands after handling

ALL SPECIFIED PARAMETERS WITHOUT A TOLERANCE ARE NOMINAL AND SUBJECT TO VERIFICATION.

